




PALLET SAVER

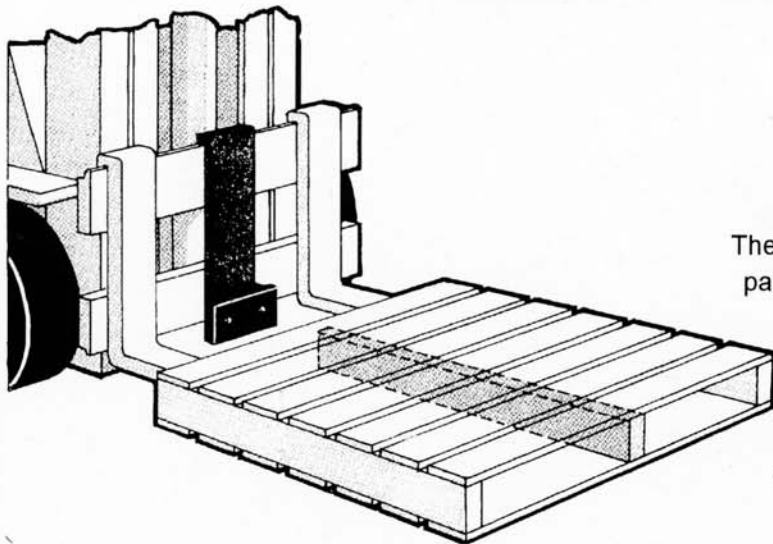


*Reduce operating costs!
Save on costly wooden pallets*

The Waldon PALLET SAVERS'S rubber surfaced panel projects one-half inch beyond the vertical front face of the forks, and absorbs and transmits the impact force to the center strut of pallet. The force, in turn, is evenly distributed to all cross members - top and bottom. In this way the cross members resist the impact force at the center, where the boards are the strongest.

SIMPLE INSTALLATION

To install, the Waldon PALLET SAVER is set on the top carriage bar and attached firmly to the lower carriage bar with a bracket. Spacer plates are furnished to adjust pad to suit the various thicknesses of forks. Removing the forks from the center slot is accomplished by loosening the PALLET SAVER'S lower mounting bracket and sliding it over far enough to allow passage of forks.

The Waldon PALLET SAVER does not interfere with fork adjustment, however, it has to be removed when forks are positioned together at the center of the carriage for a non-pallet operation.

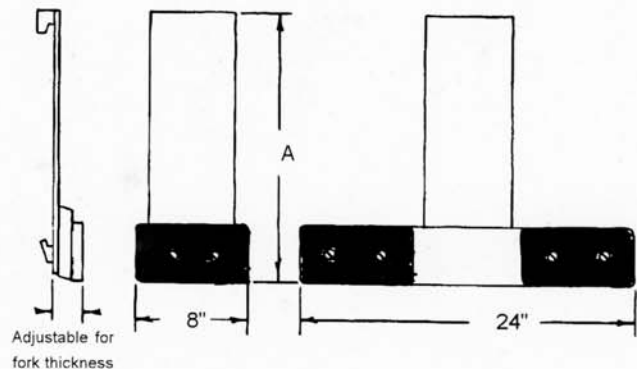

Model No.	Mounting Class	A Height (In.)	For Fork Thickness (In.)
Single Pad			
311118	II	19.5	1.5-1.75
311324	III	23.6	1.75-2.0
Dual Pad			
*311191	II	19.5	1.5-1.75
*311241	III	23.6	1.75-2.0

* Dual Bumper models U.S. Patent No. 4, 102, 464

